




ENGINE TYPE: VQ30DE ENGINES

CAM TIMING SPEC. FOR: **VQ30DE JWT S1 (V2)**

Event	AVQ30-000S1
a (EX)	260
b(IN)	260
c(IO)	17
d(IC)	63
e(EC)	17
f(EO)	63
g*(EX)	0.405"*
h*(IN)	0.405"*
I L/C	113
E L/C	113

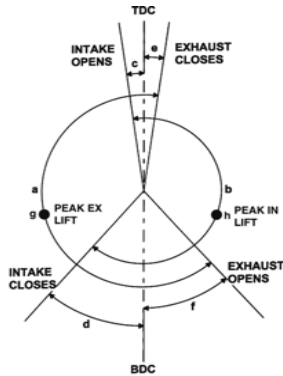

COLD VALVE LASH:

INT	.010-.013"
EXH	.010-.013"

USE FACTORY MANUAL

222.5 DEG @ .050" LIFT (.010" LASH)

\* GROSS LIFT


DUR. IS @ .016" LASH



ENGINE TYPE: VQ30DE ENGINES

CAM TIMING SPEC. FOR: **I30 MAXIMA 95-96 STD**

Event	VQ30 STD
a (EX)	232
b(IN)	232
c(IO)	3
d(IC)	49
e(EC)	3
f(EO)	49
g*(EX)	0.338"*
h*(IN)	0.338"*
I L/C	113
E L/C	113

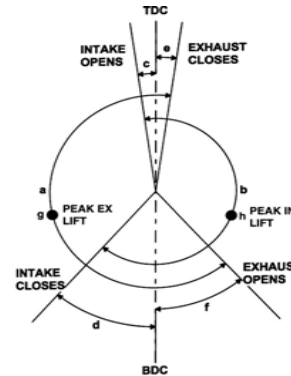

COLD VALVE LASH:

INT	.010-.013"
EXH	.011-.015"

USE FACTORY MANUAL

205.5 DEG @ .050" LIFT (.010" LASH)

\* GROSS LIFT


DUR. IS @ .016" LASH



ENGINE TYPE: VQ30DE ENGINES

CAM TIMING SPEC. FOR: **ODEM - FROM I30 PACE CAR**

Event	VQ30 STD
a (EX)	230
b(IN)	264
c(IO)	26
d(IC)	58
e(EC)	20
f(EO)	30
g*(EX)	0.350"*
h*(IN)	0.375"*
I L/C	106
E L/C	95

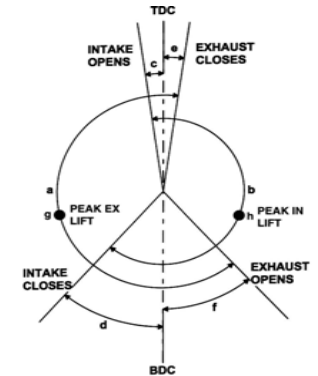

COLD VALVE LASH:

INT	.010-.013"
EXH	.011-.015"

USE FACTORY MANUAL

??DEG @ .050" LIFT

\* GROSS LIFT

DUR. IS @ .??? " LASH

