



Pressure Plate Locating Dowels

Install the dowels in the holes marked "A" for Nissan and JWT VQ35 Clutches. These are the 3 unthreaded holes closest to the center of the flywheel.

(This flywheel also has an additional clutch bolt pattern for other types of clutches see JWT for more info)




Flywheel Mounting Washers


Install washers on new (recommended) factory flywheel to crank bolts. Torque bolts to **70 ft/lbs** and then loosen. Retighten using **RED LOCTITE** to **70 - 75 ft/lbs**.

Using **RED LOCTITE** torque the clutch bolts to **30 - 33 ft/lbs**.

Caution: Nissan flywheels have a locating dowel in the crankshaft register. Failure to align this dowel with the hole in the flywheel will damage your flywheel and crankshaft!



L3503-NF000

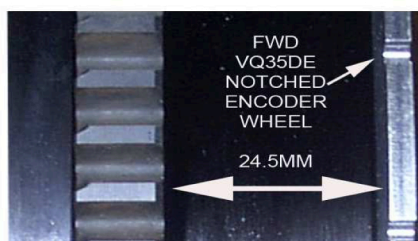

LALT2-NF000



3507-NFHR0

CHECK TO CONFIRM THAT YOU HAVE THE CORRECT JWT FLYWHEEL FOR YOUR APPLICATION