
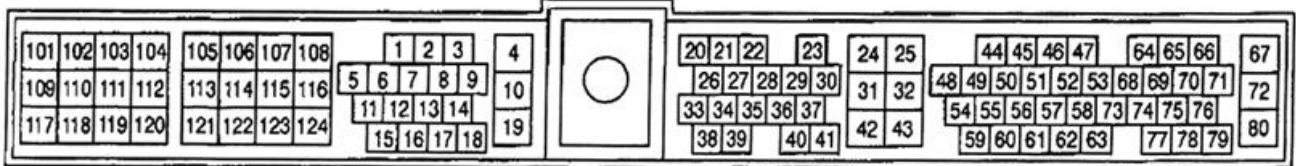


95-96 NISSAN MAXIMA ECU & WIRING FOR USE WITH VQ30DE ENGINE IN ALTERNATE APPLICATIONS

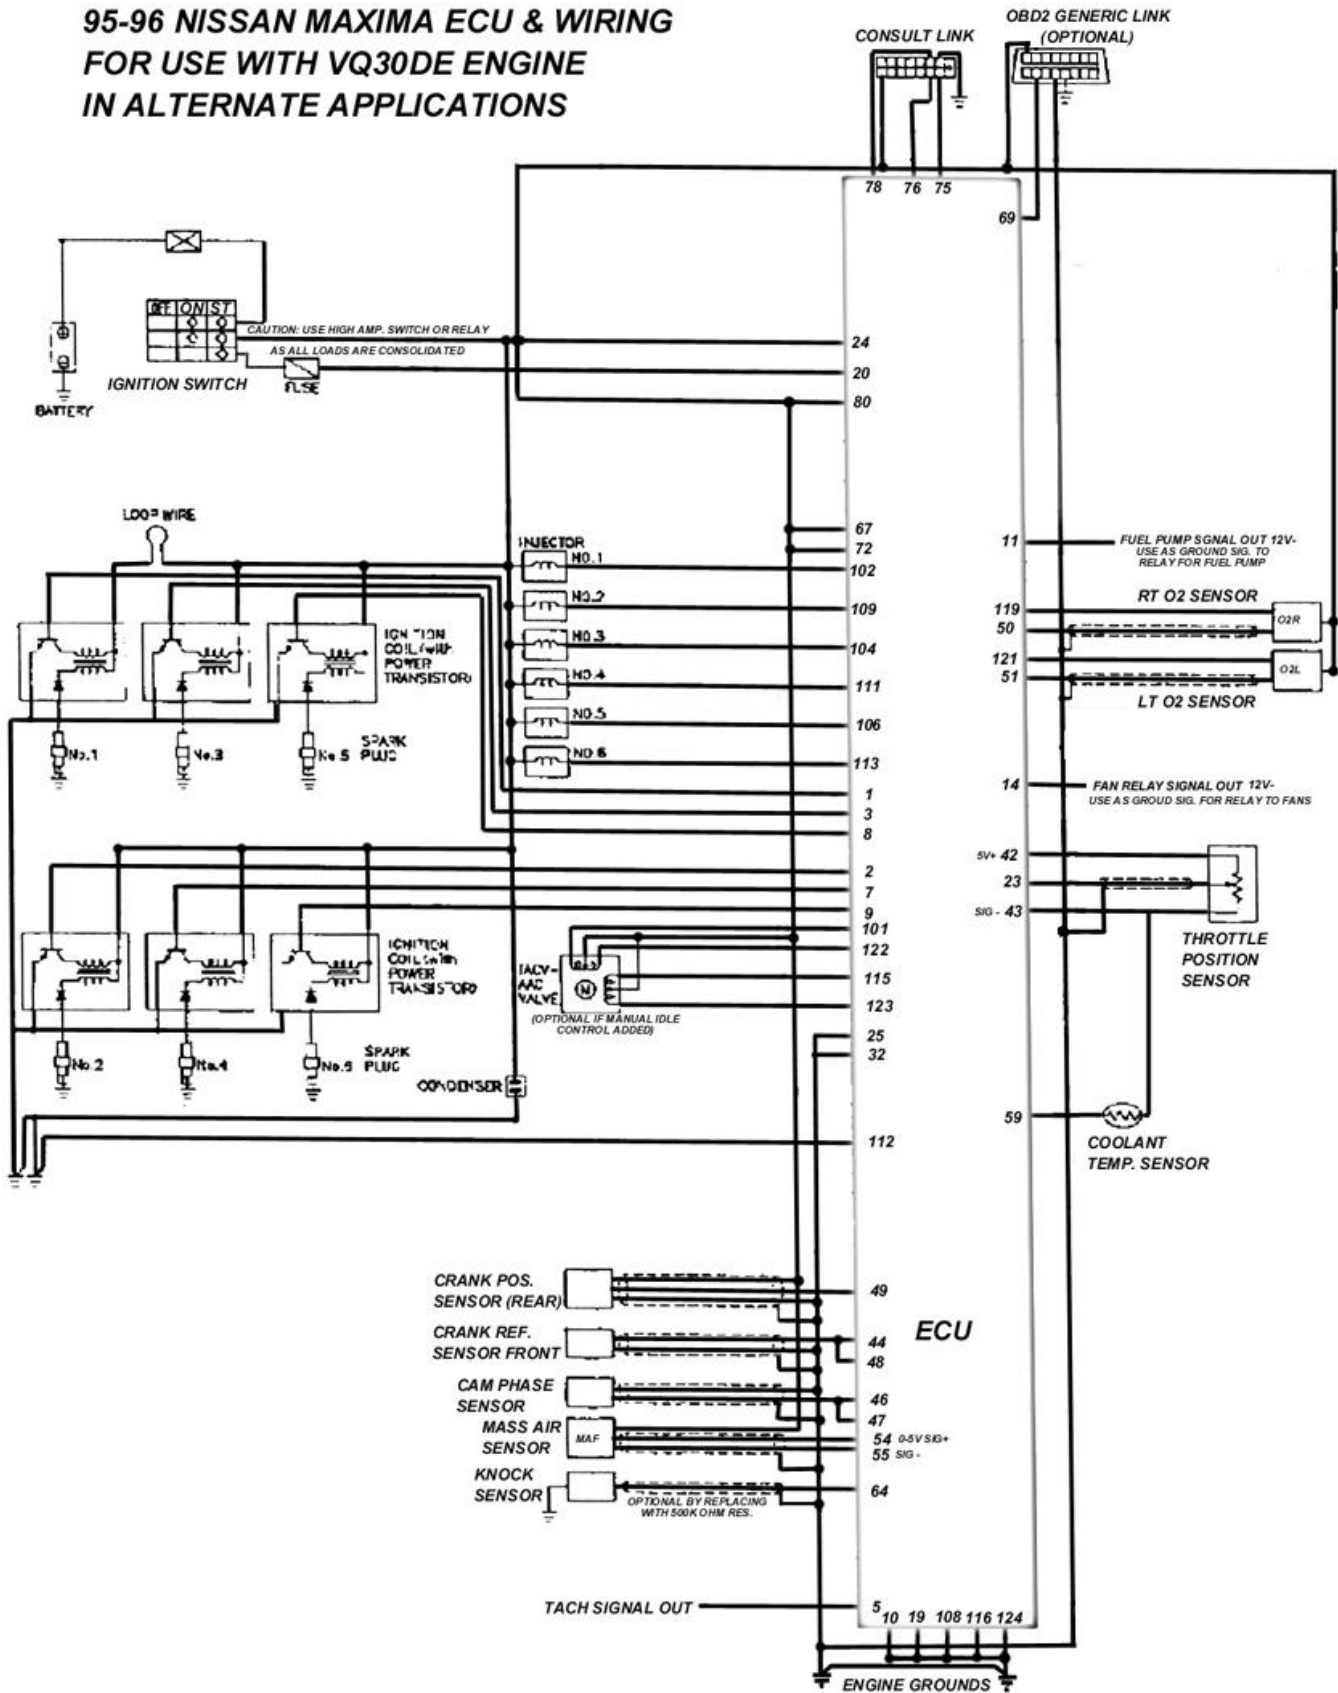

96 MAXIMA WIRING LOOM STRIPPED TO RUN VQ30DE IN ALTERNATE APPLICATIONS

ECU PIN#	DESCRIPTION	COLOR
1	IGN COIL #1	Y/R
2	IGN COIL #2	G/R
3	IGN COIL #3	L/R
5	TACH SIGNAL OUTPUT	W/G
7	IGN COIL #4	GY
8	IGN COIL #5	PU/W
9	IGN COIL #6	GY/R
10	GROUND	B
11	FUEL PUMP SIGNAL TO RELAY GRD	B/P
14	FAN RELAY SIGNAL OUTPUT	LG/R
19	GROUND	B
20	STARTER SIGNAL	BR/W
23	TPS SIGNAL INPUT	W/G
24	SWITCHED 12V+	R
25	GROUND	B
32	GROUND	B
42	TPS 5V+	R
43	TPS GROUND	B
44	CRANK REF. INPUT	W
46	CAM PHASE INPUT	W
47	CAM PHASE INPUT	W
48	CRANK REF. INPUT	W
49	CRANK POS. INPUT	W
50	O2 SENSOR RIGHT INPUT	W
51	O2 SENSOR LEFT INPUT	W
54	MAF INPUT SIGNAL + INPUT	W

ECU PIN#	DESCRIPTION	COLOR
55	MAF INPUT SIGNAL - INPUT	B
59	COOLANT TEMP SENSOR INPUT	Y
64	KNOCK SENSOR INPUT	W
67	SWITCHED 12V+	R
69	OBD2 COMM LINK	G/B
72	SWITCHED 12V+	R
75	CONSULT LINK	BR/Y
76	CONSULT LINK	PU/W
78	CONSULT LINK	LG
80	SWITCHED 12V+	W
101	IDLE MOTOR A	PU/G
102	INJ #1	R/B
104	INJ #3	R/Y
106	INJ #5	L/W
108	GROUND	B
109	INJ #2	R/G
111	INJ #4	B/OR
112	GROUND	B
113	INJ #6	PU/R
115	IDLE MOTOR C	GY/G
116	GROUND	B
119	O2 SENSOR RIGHT HEATER GROUND	L/Y
121	O2 SENSOR LEFT HEATER GROUND	L
122	IDLE MOTOR B	Y
123	IDLE MOTOR D	GY/L
124	GROUND	B

ABBREV.	COLOR
B	BLACK
BR	BROWN
CH	DARK BROWN
DG	DARK GREEN
GY	GRAY
G	GREEN
L	BLUE
LG	LIGHT GREEN
OR	ORANGE
P	PINK
PU	PURPLE
R	RED
SB	SKY BLUE
W	WHITE
Y	YELLOW

